

NORGIPS S GKB 9,5 mm type A

Standard plasterboard

NORGIPS®



PRODUCT DESCRIPTION

This standard plasterboard features tapered, cardboard-laminated longitudinal edges and square transverse edges.

Colour – ivory-coloured cardboard with designations in blue.

INTENDED USE

Plasterboard for indoor construction purposes. Designated for interior lining of any kind and for use as a part of dry lining systems applied in rooms with a relative humidity not exceeding 70%. The maximum application temperature is 50°C. The plasterboard designation includes the panelling of suspended ceilings and the cladding of walls in the form of a dry lining.

TECHNICAL PARAMETERS


Type of edge	NORGIPS S (KS)
Reaction-to-fire performance	A2-s1, d0
Flexural strength [N]:	
longitudinal direction	≥400
cross direction	≥160
Water vapour diffusion resistance factor [μ]	10
Thermal conductivity coefficient [λ]	0,25 W/(m*K)



Plasterboards + Profiles + Compound + Accessories = NORGIPS Solution

ADVANTAGES

- **Lightweight.** Easy and simple plasterboard transportation at mounting work.
- **Edge S.** Tapered longitudinal edges make finishing of the panel joints easier. Due to an appropriate moulding and the use of joint compounds belonging to the Norgips system as well as joint tapes for joint finishing, a joint with a maximum strength can be obtained.

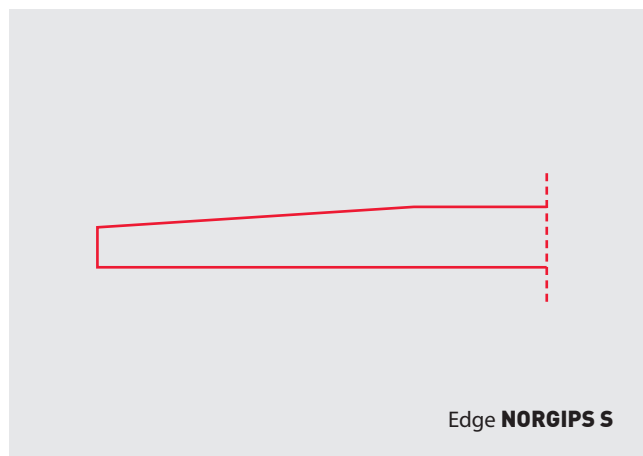

DIMENSIONS AND PACKAGING

Thickness (mm)	Width (mm)	Length (mm)	Quantity per pallet		Weight [kg/m ²]	
			(pcs)	(m ²)	1 m ²	Pallet
9,5	1200	2000	84	201,60	5,8	1169
9,5	1200	2600	84	262,08	5,8	1520

NOTES FOR GUIDANCE

Use the NORGIPS plasterboards in accordance with the NORGIPS system recommendations. Storage: store the boards on a flat surface, preferably on a pallet. Keep dry. Plasterboard transport on the construction site: keep the butt edge in vertical position when carrying.

ADDITIONAL INFORMATION

Applicable standard: PN-EN 520+A1:2012 Gypsum plasterboards. Definitions, requirements and test methods.

Declaration of Performance: available on the website www.norgips.pl

NORGIPS sp. z o.o.

ul. Krakowiaków 50,
02-255 Warsaw, PL
tel. + 48 605 338 181

www.norgips.eu

The data presented in this leaflet constitutes solely a product description. It represents a general guidance based on our knowledge and experience, not related to specific applications. Since our products are subjected to constant improvements and development, we reserve the

right to change their parameters without prior notice. The data presented herein cannot form a basis for any claims. If you have any questions, please contact the Norgips Technical Department / Norgips Representative.